

VS100 Spray Control System



Overview


The VS100 spray control system can automatically adjust the spray rate in real time according to the speed of the vehicle, the spray width and the target spray volume. When the speed is fast, the spray volume is increased. When the speed is slow, the spray volume is reduced to ensure uniform application per unit area.

VS100

Parameter

| Term | System reliability | Pressure | Speed Accuracy | Flow variable Range | Position Accuracy | Maximum Pressure | Numbers of Valves | Navigation |
|-----------|--------------------|----------|----------------|---------------------|-------------------------------------|------------------|-------------------|------------|
| Parameter | 98% | ≤15Mpa | 0.05m/s | 10~250L/min | SBAS/RTD:diameter RTK:centimeter | Adjustable | Optional | Guidance |

Component

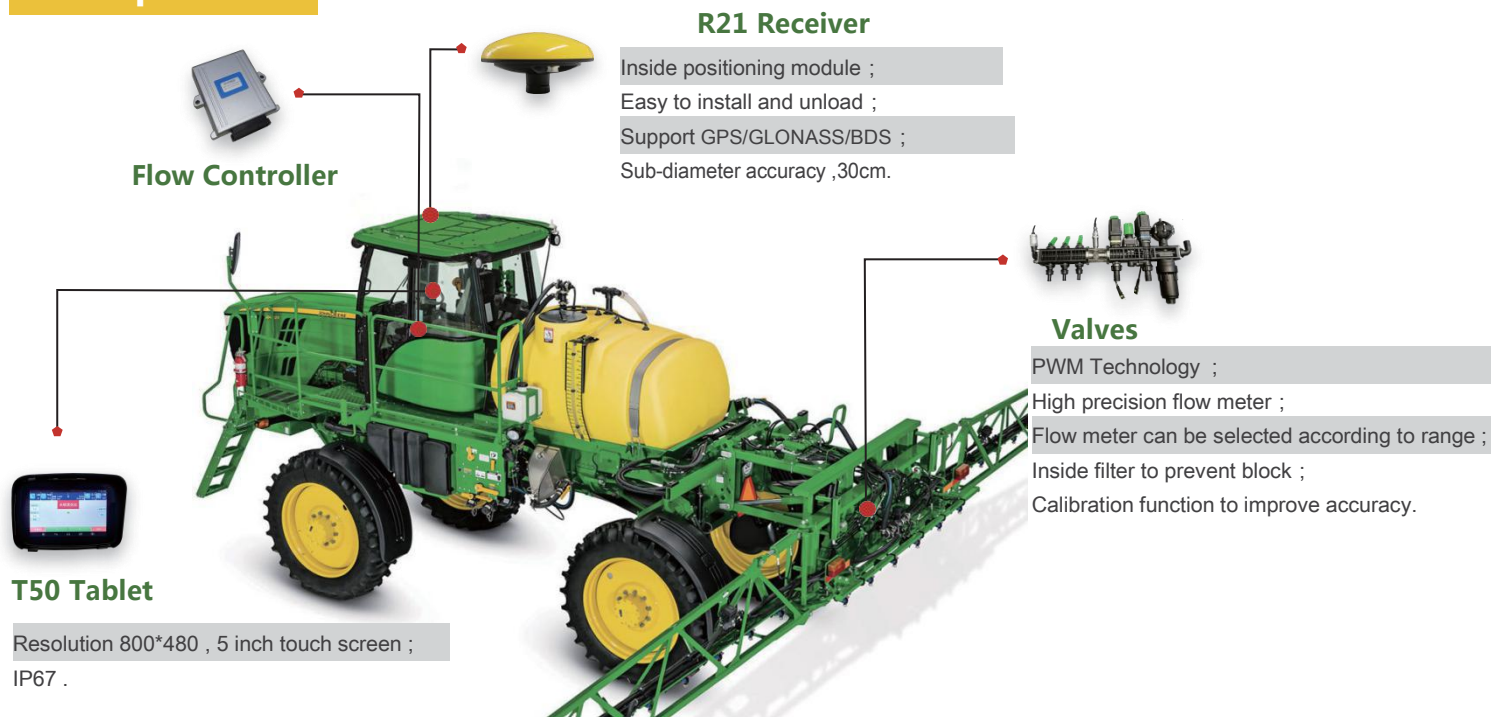


Features

1. Automatic mode/ Manual mode can be chosen ;
2. Widely used in spraying machine and Liquid fertilizer applicator ;
3. Easy to operate ;
4. Remote obtaining job information in the server ;
5. Strong stability, reliability and compatibility ;
6. Reduce cost and increase efficiency ;
7. Inside alarm system to protect system.



Function List

User Interface

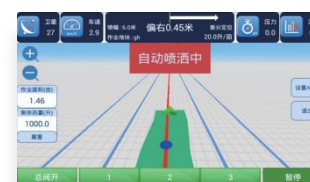

Shanghai Allynnav Technology Co.,Ltd.

Tel : 021-61200180
 Fax : 021-39883511
 Email : globalsales@allynav.cn
 Website : www.allynav.com
 Address : Room201,Building No.1,Lane215,Gaoguang Road,Qingpu District, Shanghai City, CHINA

